

FIBERPOINT® ET G

Fiber Optic Fault Locator with rechargeable battery -
Made in Germany

(Part-Number: 1400000103 /1400000103Q)



The compact design of the visual fault locator is very suitable for daily use in all fiber optic applications e.g. in the field, in industrial environment as well as in laboratory.

APPLICATIONS

- To check singlemode/multimode optical fibers and other fiber optic components on faults.
- Patching of fibers.
- Continuity check up to ~ 3 km

FEATURES

- Private labelling is available at no extra cost.
- Minimum order quantity applies

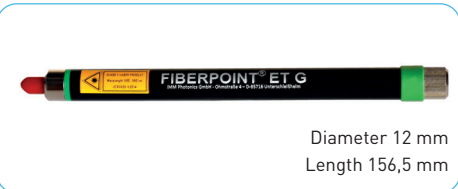

Parameter	Min.	Typ.	Max.
Wavelength	510 nm	520 nm	530 nm
Operation temperature	- 10 °C		45 °C
Storage temperature	- 40 °C		70 °C
Fiber coupled power: Singlemode fiber 9/125 µm Multimode fiber 50/125µm	200 µW 200 µW	300 µW 300 µW	390 µW 390 µW
Optical output power			< 400 µW
Retention force for ferrule		1 - 2 N	
Weight incl. batteries			56 g
Operation time - one battery pack ¹ (Pulsed mode)			8 hours
Battery type			AAA batteries / AAA rechargeable batteries
Operation mode			continuous wave; pulsed mode: frequency 2 - 3 Hz
Laser protection class			1
Suitable ferrule 2.5 mm			DIN, E2000, FC, SC, ST

INCLUDED IN DELIVERY

Dust cap, One battery pack (¹ Battery: VARTA Industrial Alkaline No. 4003; 1.5 V; AAA), Instruction manual

ACCESSORIES (NOT INCLUDED)

Adapters for 1.25 mm ferrules (1400000070), POF (1400000078) and SMA (1400000088) are available

ORDER NUMBER

- 1400000103: Individually packed in etui style plastic packaging
- 1400000103Q: Individually packed in Quadrosafe

NOTES

Compliant with RoHS-requirements (2011/65/EU from 08.06.2011). The above product specifications are subject to change without notice. Release 04/2020.