

DESCRIPTION

This is a right angle mount 567 nm Green LED optimized for PCB mount applications requiring wide angle viewing and low power consumption.

ABSOLUTE MAXIMUM RATINGS

- Storage temperature..... -40°C to +85°C
- Case operating temperature -40°C to +85°C
- Lead solder temperature.... 260°C, 10 seconds
- Continuous forward current..... 30 mA
- Peak Forward Current..... 0.5 A \1
- Reverse Voltage..... 5 Volts
- \1 1 µsec pulse width, 300 Hz

OUTLINE DIMENSIONS

Tolerances are +/-0.005 inches, except as noted

Pinout

- 1. Anode 2. Cathode

The plastic case is electrically isolated from the pins.

FEATURES

- 567 nm Green
- Right Angle PCB Mount
- High Reliability
- Low Power Consumption
- Diffused Lens
- Similar to 1N6502
- Available screened to MIL-PRF-19500/521

PRELIMINARY

ELECTRO-OPTICAL CHARACTERISTICS (Case T = 25°C)

PARAMETER	TEST CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Forward Voltage	If = 20 mA	V _f		2.3	3.0	Volts
Reverse Current	V _r = 3V	I _r	1.0			µA
Half Angle at Half Intensity		θ _{1/2}		30		DEG
Capacitance	V _r = 0 V, f = 1 MHz	C		100		pF
Luminous Intensity 1	If = 20 mA, 0 degrees	I _{v1}	6.0	20		mcd
Luminous Intensity 2	If = 20 mA, 30 degrees	I _{v2}	1.0	5.0		mcd
Peak Wavelength	If = 20 mA	λ _p	540	567	578	nm


distributed by



Ohmstrasse 4
 85716 Unterschleissheim
www.imm-photonics.de

Tel.: +49 89 3214120
 Fax.: +49 89 32141211
sales@imm-photonics.de

PACKAGE OUTLINE

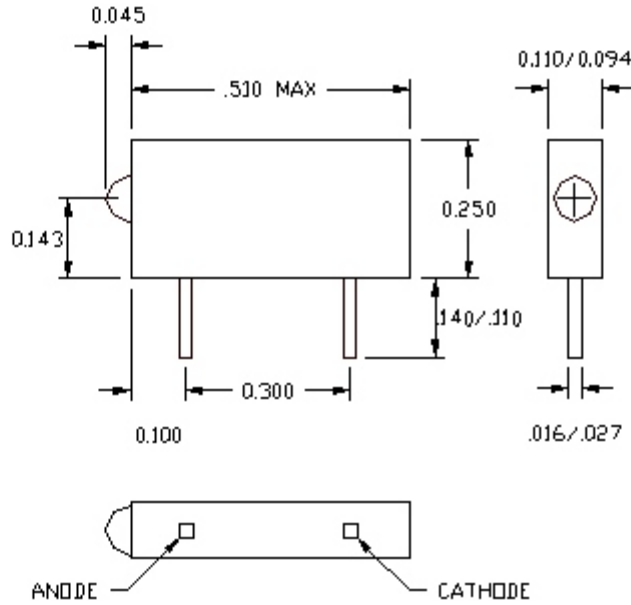

distributed by