

# UV-C LED Sensor

## GUVCL-T10GD



### Features


- Aluminium Gallium Nitride Based Material
- Schottky-type Photodiode
- Photovoltaic Mode Operation
- Good Solar Blindness



### Applications

- UV-C LED Monitoring (265,270,280nm)**
- Pure UV-C Monitoring
- Sterilization Lamp Monitoring

### Outline Diagrams and Dimensions

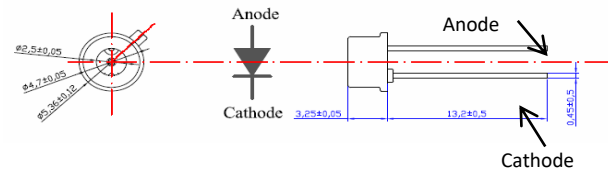

### Absolute Maximum Ratings


Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	$T_{st}$	-40	90	°C	
Operating Temperature	$T_{op}$	-30	85	°C	
Reverse Voltage	$V_{r, max.}$		3	V	
Forward Current	$I_{f, max.}$		1	mA	
Optical Source Power Range	$P_{opt}$	0.01	100	mW/cm <sup>2</sup>	UVC LED
Soldering Temperature	$T_{sol}$		260	°C	within 10 sec.

※Notice: apply to us in the case that Optical Source Power is over 100,000μW/cm<sup>2</sup>.


### Characteristics (at 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Dark Current	$I_d$			1	nA	$V_r = 0.1$ V
Photo Current	$I_{ph}$	58	65	72	nA	UVC LED, 1mW/cm <sup>2</sup>
Temperature Coefficient	$I_{tc}$		0.1		%/°C	UVC LED
Responsivity	R		0.1		A/W	$\lambda = 280$ nm, $V_r = 0$ V
Spectral Detection Range	$\lambda$	230		320	nm	10% of R
Active area			0.076		mm <sup>2</sup>	

### Responsivity Curve

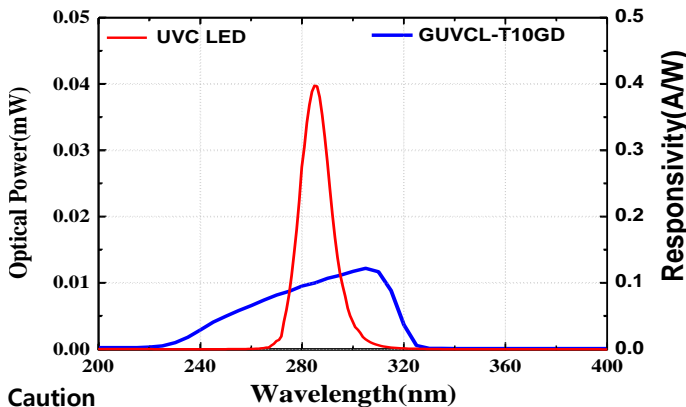

### Output Voltage along UV Power

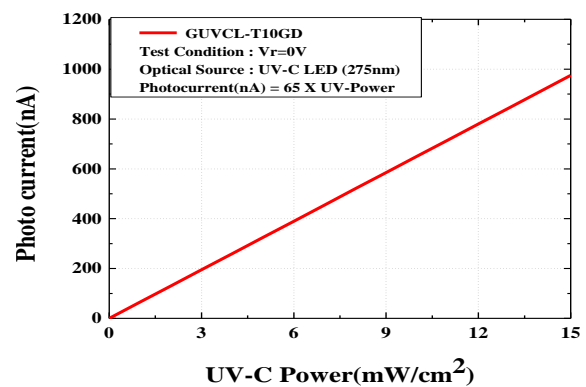

### Caution

ESD can damage the device hence please avoid ESD. Insulate the cap of TO-CAN or it can cause malfunction of the device.